

**Warewashing**  
**Small Double Skin Glasswasher, 1 cycle,**  
**drain pump, detergent and rinse aid**  
**dispensers, 30b/h**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**402202 (ESIG)**

Glasswasher (small), with double skin, built-in drain pump, detergent and rinse aid dispensers, 1 cycle, 30b/h

### Short Form Specification

**Item No.** \_\_\_\_\_

Unit shall be Electrolux Professional green&clean Glasswasher type hot water rinsing using rack dimension of 400\*400mm. Electrical characteristics to be 230 volts single phase 50Hz operation with one wash cycle of 120 seconds. Washing performance is ensured by a powerful wash pump, revolving washing spray arms from both bottom and top. Rinse temperature and pressure guaranteed by built in pressure boiler. Double skinned counter-balance door. Large door opening of 290mm for washing tall glasses. Double skinned cabinet. Pressed tank with round corners. 304 stainless steel construction to include door, frame, wash arms and rinse arms. The unit shall include drain pump, detergent and rinse aid dispenser pumps and is equipped with electric cable with Schuko plug.

### Main Features

- Deep drawn pressed wash tank with fully rounded corners, sloped towards the drain to prevent dirt build up provides fast drainage in only a few minutes. Pressed wash tank with no welded points offer a guaranteed water tight solution.
- Low noise level.
- 120 seconds cycle.
- Built-in pressure boiler designed to raise incoming water to a guaranteed minimum temperature of 82° C for sanitizing rinse. No external boiler is required.
- Maximum capacity of 30 racks per hour.
- Equipped with single phase electrical cable and Schuko plug for easy and fast installation.
- Washing system endowed with rotating washing arms from both top and bottom, high powered wash pump and large capacity wash tank guarantee professional washing.
- Easy service access to main components without moving the unit.
- Optional rinse booster pump available to be installed on site.
- Built-in rinse aid and detergent dispenser with automatic initial and continuous cycle loading for perfect result while minimizing service and maintenance needs.
- Equipped with drain pump for easy and quick installation without opening the machine.


### Construction

- Completely closed on the back by a cover plate.
- Wash/rinse arms and nozzles in stainless steel.
- Finished in top quality stainless steel with double skinned construction to aid durability and reduce noise.
- Internal components (arms and filter) are easy extractable.
- Unit to feature rinse aid and detergent dispenser pumps.

### Sustainability

- 304 AISI stainless steel front panel, load bearing frame, wash tank, wash and rinse arms.
- Insulated double skin door construction preserves heat inside the tank to lower energy consumption and the noise. Counter-balance mechanism minimizes impact when opening and closing.
- Electronic controls with built-in programming, self-diagnostics.
- Simple operation control panel.

**APPROVAL:** \_\_\_\_\_

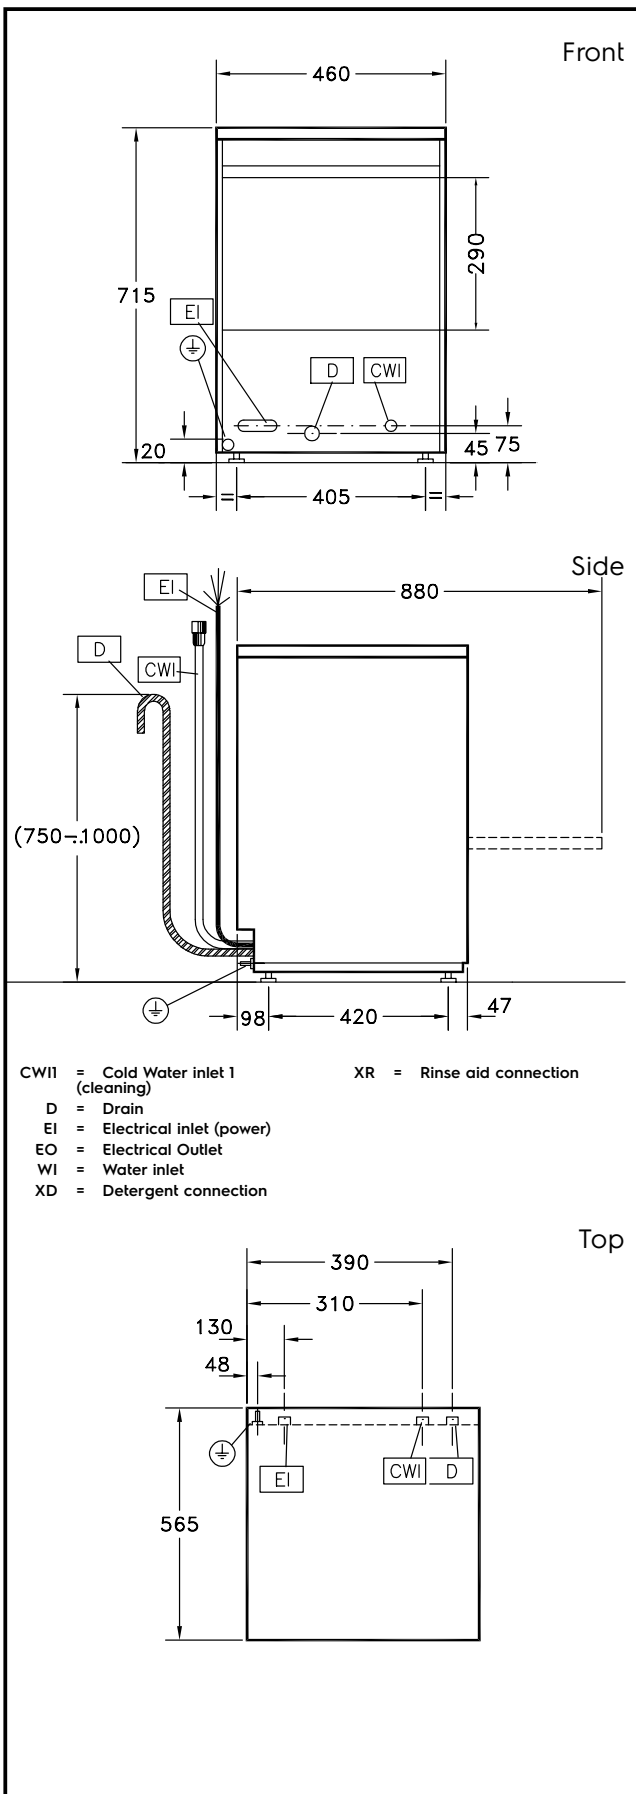

### Electric

<b>Supply voltage:</b>	
402202 (ESIG)	230 V/1 ph/50 Hz
<b>Default Installed Power:</b>	3.3 kW
<b>Boiler heating elements:</b>	2 kW
<b>Tank heating elements:</b>	0,8 kW
<b>Wash pump size:</b>	0.3 kW

### Water:

<b>Pressure, bar min/max:</b>	1.8-3 bar
<b>Drain line size:</b>	27mm
<b>Washing tank capacity (lt):</b>	6
<b>Boiler Capacity (lt):</b>	5
<b>Incoming water line size:</b>	G 3/4"

### Key Information:

<b>Baskets per hour*:</b>	30
<b>Working cycles time (sec.):</b>	120
<b>Wash temperature:</b>	55-65°C
<b>Cell dimensions - width:</b>	400 mm
<b>Cell dimensions - depth:</b>	400 mm
<b>Cell dimensions - height:</b>	290 mm
<b>Rinse temperature:</b>	80-90 °C
<b>External dimensions, Width:</b>	460 mm
<b>External dimensions, Depth:</b>	565 mm
<b>External dimensions, Height:</b>	715 mm
<b>Net weight:</b>	37 kg
<b>Shipping weight:</b>	41 kg
<b>Shipping height:</b>	880 mm
<b>Shipping width:</b>	650 mm
<b>Shipping depth:</b>	530 mm
<b>Shipping volume:</b>	0.3 m <sup>3</sup>

### Sustainability

<b>Water supply temperature*:</b>	10 °C
<b>Water consumption per cycle (lt):</b>	2.3
<b>Noise level:</b>	67.5 dBA