

# LipuMobil-S

## Product information for the product group


### ACO Product benefits

- Suitable for flow rates up to 0.5 l/s
- Reaction to fire A1 material
- Hygienic material


- Applications:
  - Mobile snack bars
  - Mobile dishwashers
- Can only be used with
  - Connection of 1 industrial dishwasher with a minimum washing time of 1 min. with a changeover time of 1/2 minute (total cycle time  $t_z = 1\frac{1}{2}$  Min.)
  - Rinsing water consumption of the industrial dishwasher pre-wash = 5 l
  - Alongside the dishwasher, max 1 item of equipment for pre-rinsing the dishes (briefly) can be connected.
- Made from stainless steel, material grade 316
- For mobile dishwashing equipment
- With integrated sludge trap
- Free-standing construction in frost-free areas
- Cover with locking ring
  - Diameter: 350 mm
- System ACO Passavant
  - Building Supervisory Authority approval Z-54.6-316



## Item Technical Data 7301.30.40

	Nominal width	Contents			Weight	
		Sludge trap	Grease store	Overall	Empty	Full
		[l]	[l]	[l]	[kg]	[kg]
	DN 50	10	9	32	20	52

**Dimensions**

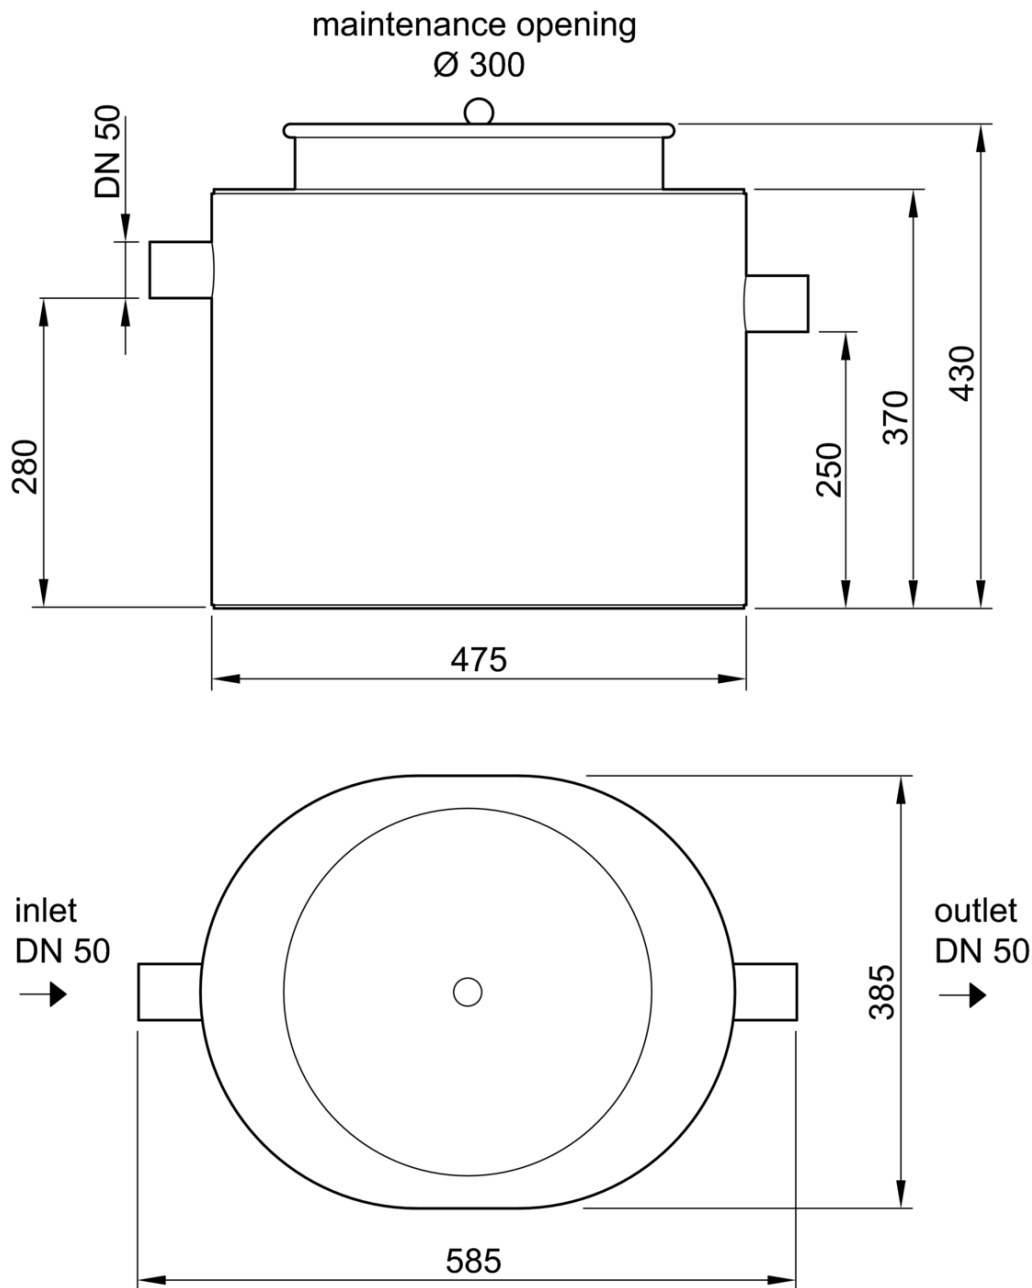

**Accessories**

Description	Used with	Weight [kg]	Item number
<b>Frame with castors</b> ■ Stainless steel, material grade 316 ■ With 4 feed rollers	■ LipuMobil-P/LipuMobil-S	19.1	0153.20.81

You can find further accessories under → <https://www.buildingdrainage.aco/suche/?q=7301.30.40>